



Ø Eje	d	D	D1	L1	L2
TIPO 600-3/8"A	9,53	23.8	22.23	6.35	16.08
TIPO 600-3/8"	9,53	26.97	25.4	7.93	16.86
TIPO 600-1/2"A	12.7	26.97	25.4	6.35	16.86
TIPO 600-1/2"	12.7	26.97	25.4	7.93	16.86
TIPO 600-5/8"	15.88	30.94	31.75	10.31	18.44
TIPO 600-3/4"	19.05	34.11	34.93	10.31	18.44
TIPO 600-7/8"	22.23	42.85	41.28	11.1	20.82
TIPO 600-1"	25.4	42.85	41.28	11.1	20.82




Condiciones de Trabajo

Temperatura: -20°C ~ 110°C

Presión: ≤ 8 Bar

Velocidad: ≤ 10m/Seg

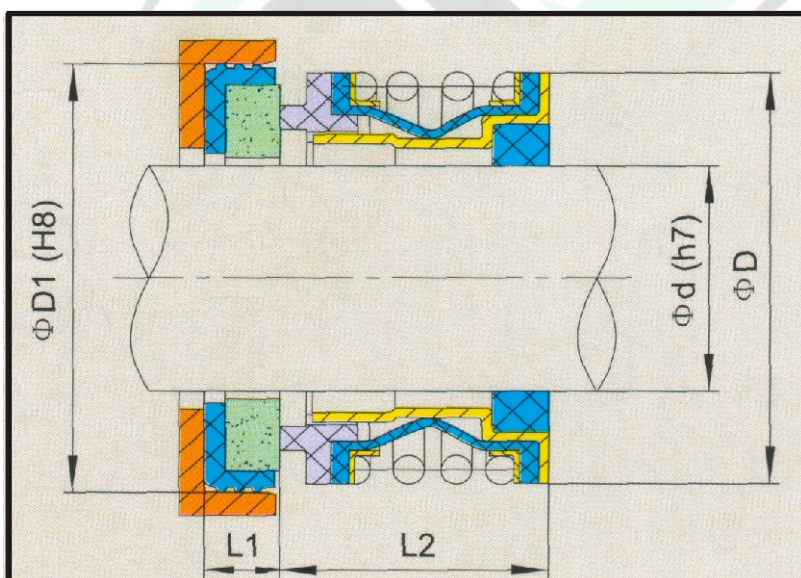

Materiales Combinados

Anillo estacionario (Cerámico/SiC/TC)

Anillo de rotación (Carbón/SiC/TC)

Sello secundario (NBR/EPDM/Vitón)

Muelle y partes metálicas (Acero)